


AWWA Standard Resilient Seat Gate Valve

Product Description

Name	Description
Model	Z(5/9)41X-150LB, Z(5/9)45X-150LB
Name	AWWA Standard Resilient Seat Gate Valve
Size	DN50-DN600
Pressure	Class150
Temp.	-20~120°C
Suitable Medium	Freshwater, sea water, sewage, weak acid base, air, steam etc.
Body	DI
Seat Seal	NBR/EPDM
Disc	DI+NBR/DI+EPDM
Shaft	2Cr13
Actuator	Handwheel/Gearbox/Electric/Pneumatic

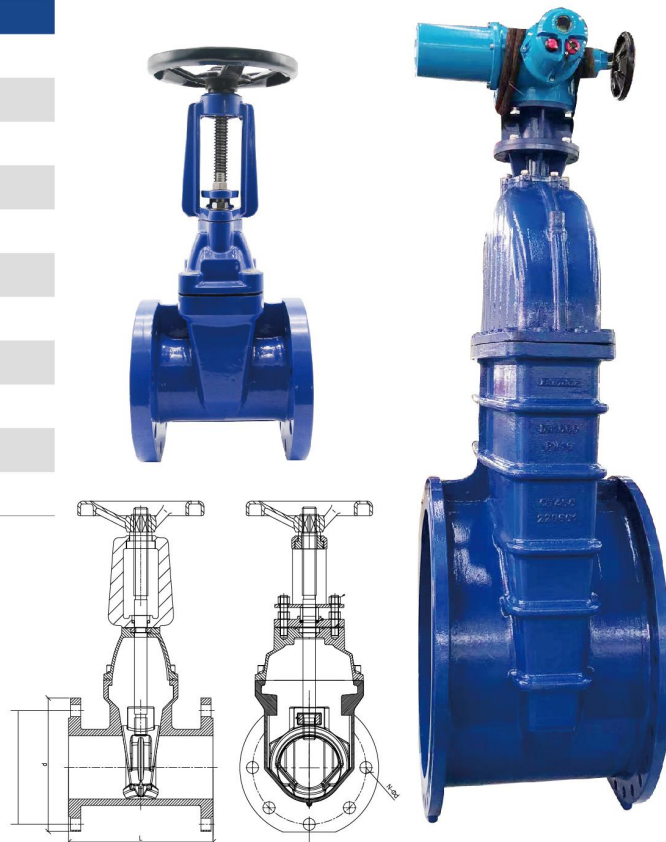

Executive Standard

Name	Standard
Design and Manufacture	API 600
Face to face Length	ASME B16.10
End Flange	ASME B16.5
Pressure Test	API 698

Dimensions

Size		L	150LB					
DN	NPS(Inch)		d	c	g	x-Øn	T	f
50	2"	178	152	120.5	99	4-19	15.9	2
65	2 1/2"	190	178	139.5	118	4-19	17.5	2
80	3"	203	191	152.4	132	4-19	19.1	2
100	4"	229	229	190.5	156	8-19	23.9	2
125	5"	254	254	216	184	8-22	23.9	2
150	6"	267	279	241.5	211	8-22	25.4	2
200	8"	292	343	298.5	266	8-22	28.6	2
250	10"	330	406	362	319	12-25	30.2	2
300	12"	356	483	432	370	12-25	31.8	2
350	14"	381	533	476	429	12-29	35	2
400	16"	406	597	539	480	16-29	36.6	2
450	18"	432	635	578	530/548	16-32	39.7	2
500	20"	457	699	635	582/609	20-32	42.9	2
600	24"	508	813	749.5	682/720	20-35	47.7	2