
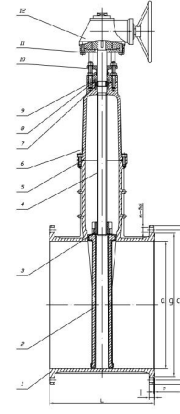


DIN/BS Standard Resilient Seat Gate Valve

► Product Description

Name	Description
Model	Z(5/9)45X-10/16, Z(5/9)41X-10/16
Name	DIN/BS Standard Resilient Seat Gate Valve
Size	DN50-DN1000
Pressure	PN10/16
Temp.	-20~120°C
Suitable Medium	Freshwater, sea water, sewage, weak acid base, air, steam etc.
Body	DI
Seat Seal	NBR/EPDM
Disc	DI+NBR/DI+EPDM
Shaft	2Cr13
Actuator	Handwheel/Gearbox/Electric/Pneumatic



DN50-DN600

DN700-DN1000

► Executive Standard

Name	Standard
Design and Manufacture	DIN 3352
Face to face Length	DIN 3202
End Flange	DIN EN 1092
Pressure Test	DIN 3230

► Dimensions

Size		L			d		c		g		f	n-Ød		T	
DN	NPS(Inch)	DIN		BS	PN10	PN16	PN10	PN16	PN10	PN16		PN10	PN16	PN10	PN16
		F4	F5	BS5163											
50	2"	150	250	178	165	165	125	125	99	99	3	4-19	4-19	19	19
65	2 1/2"	170	270	190	185	185	145	145	118	118	3	4-19	4-19	19	19
80	3"	180	280	203	200	200	160	160	132	132	3	8-19	8-19	19	19
100	4"	190	300	229	220	220	180	180	156	156	3	8-19	8-19	19	19
125	5"	200	325	254	250	250	210	210	184	184	3	8-19	8-19	19	19
150	6"	210	350	267	285	285	240	240	211	211	3	8-23	8-23	19	19
200	8"	230	400	292	340	340	295	295	266	266	3	8-23	12-23	20	20
250	10"	250	450	330	395	395	350	355	319	319	3	12-23	12-28	22	22
300	12"	270	500	356	445	445	400	410	370	370	4	12-23	12-28	24.5	24.5
350	14"	290	550	381	505	505	460	470	429	429	4	16-23	16-28	24.5	26.5
400	16"	310	600	406	565	565	515	525	480	480	4	16-28	16-31	24.5	28
450	18"	330	650	432	615	615	565	585	530	548	4	20-28	20-31	25.5	30
500	20"	350	700	457	670	670	620	650	582	609	4	20-28	20-34	26.5	31.5
600	24"	390	800	508	780	780	725	770	682	720	5	20-31	20-37	30	36
700	28"	430	900	610	895	895	840	840	794	794	5	24-31	24-37	32.5	39.5
800	32"	470	1000	660	1015	1015	950	950	901	901	5	24-34	24-41	35	43
900	36"	510	1100	711	1115	1115	1050	1050	1001	1001	5	28-34	28-41	37.5	46.5
1000	40"	550	1200	813	1230	1230	1160	1170	1112	1112	5	28-37	28-44	40	50